

Serie F

FRANTUMATORE SECONDARIO


SECONDARY PULVERIZER


BROYEUR HYDRAULIQUE


DEMOLEDOR SECUNDARIO


STARRE PULVERISIERER

GARRA PULVERIZADORA FIXAS

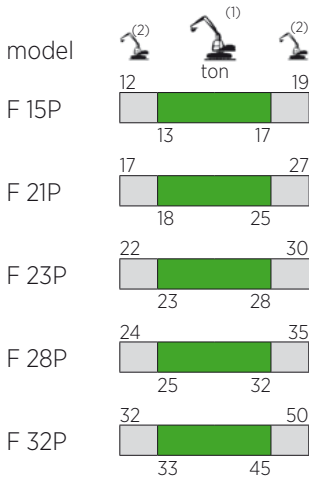

 (1) Accoppiamento escavatore-attrezzatura ottimale
Optimum excavator-equipment combination
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination
Combinação máquina-implemento ideal

 (2) Accoppiamento escavatore-attrezzatura possibile
Possible excavator-equipment combination
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination
Combinação máquina-implemento possível

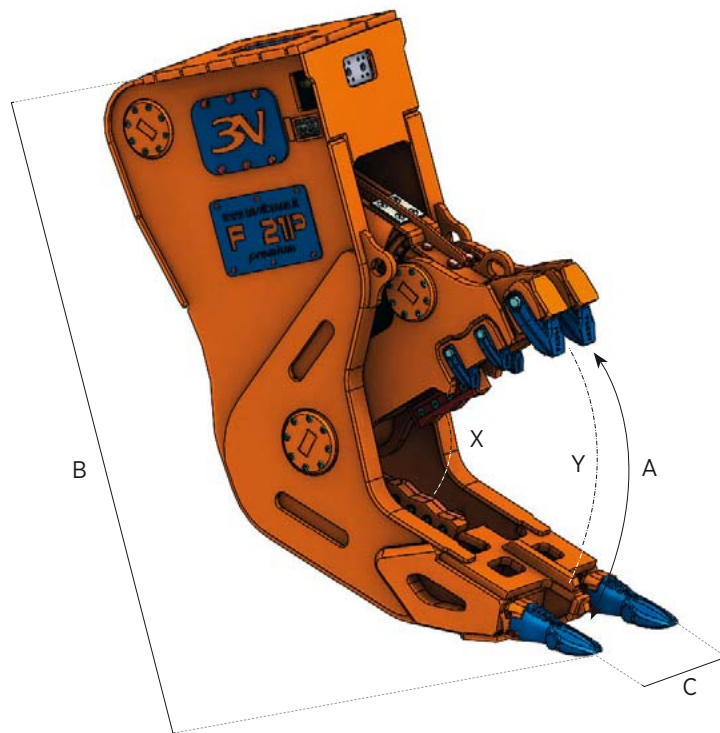








NEW



HARDOX®
WEAR PLATE



HARDOX®
IN MY BODY

		F 15P	F 21P	F 23P*	F 28P	F32P*
	kg.	1400	2055	2520	2660	3290
A	mm.	670	835	835	890	890
B	mm.	1600	1845	2215	1955	2365
C	mm.	460	540	540	670	670
	mm.	220	260	260	260	260
X	t.	205	250	250	270	270
Y	t.	90	100	100	115	115
∅ max	mm.	40	45	45	55	55
	bar	250	250	250	250	250
	l/min.	130 / 200	180 / 250	180 / 250	230 / 300	230 / 300
 max	bar	/	/	140	/	140
 max	l/min.	/	/	10	/	10
		/	/	/	/	/

(*) Modello fornito con rotazione idraulica continua a 360° / (*) Model equipped with continuous hydraulic 360° rotation

(*) Modèle équipé de rotation hydraulique à 360° en continu / (*) Modelo entregado con rotación hidráulica continua a 360°

(*) Modell ausgestattet mit hydraulischer kontinuierliche 360° Drehvorrichtung / (*) Modelo com rotação hidráulica continua de 360°